


CONSTRUCTION MATERIAL KEY:


- 01 EPDM ROOFING
- 02 RIGID INSULATION
- 03 STEEL DECKING
- 04 TREATED WOOD BLOCKING
- 05 STAINLESS FLASHING
- 06 3/4" DIA. ASTM 325 BOLTS
- 07 STAINLESS DRIP FLASHING
- 08 STEEL COLUMN W8X24 @ 24'-0" O.C.
- 09 3/4" THICK ANODIZED ALUMIMUM FASCIA
- 10 STEEL PRIMARY BEAM W16X45
- 11 KAWNEER WINDOW 451T SPACED 4'-0" O.C.
- 12 STEEL SECONDARY BEAMS W10X19 @ 12'-0" CENTERS
- 13 STEEL SECONDARY BEAMS W8X21 @ 6'-0" CENTERS
- 14 RIGID INSULATION
- 15 1/2" TK. FIBER CEMENT PANEL
- 16 3/4" THICK ANODIZED ALUMIMUM FASCIA
- 17 THERMAL BREAK
- 18 CORRUGATED METAL SIDING
- 19 VAPOR BARRIER
- 20 1 1/2" TK. RIGID INSULATION
- 21 10" TK. CAST IN PLACE CONCRETE FOUNDATION WALL
- 22 #4 REINFORCING STEEL
- 23 WATERPROOFING
- 24 REINFORCED CONCRETE FOOTING
- 25 GRAVEL BACKFILL
- 26 FOUNDATION DRAIN
- 27 POLISHED CONCRETE SLAB
- 28 WELDED WIRE MESH
- 29 STEEL DECKING
- 30 CONCRETE SLAB W/ WELDED WIRE MESH
- 31 VAPOR BARRIER
- 32 GRAVEL BACKFILL
- 33 1/2" DIA. ANCHOR BOLTS
- 34 18" WIDE CONCRETE PIER
- 35 5/8" DENSGLASS GYPSUM BOARD SHEATHING
- 36 COLD ROLLED METAL FRAMING @ 16" O.C. SPACING
- 37 STAINLESS STEEL FLASHING W/ SILL SEAL

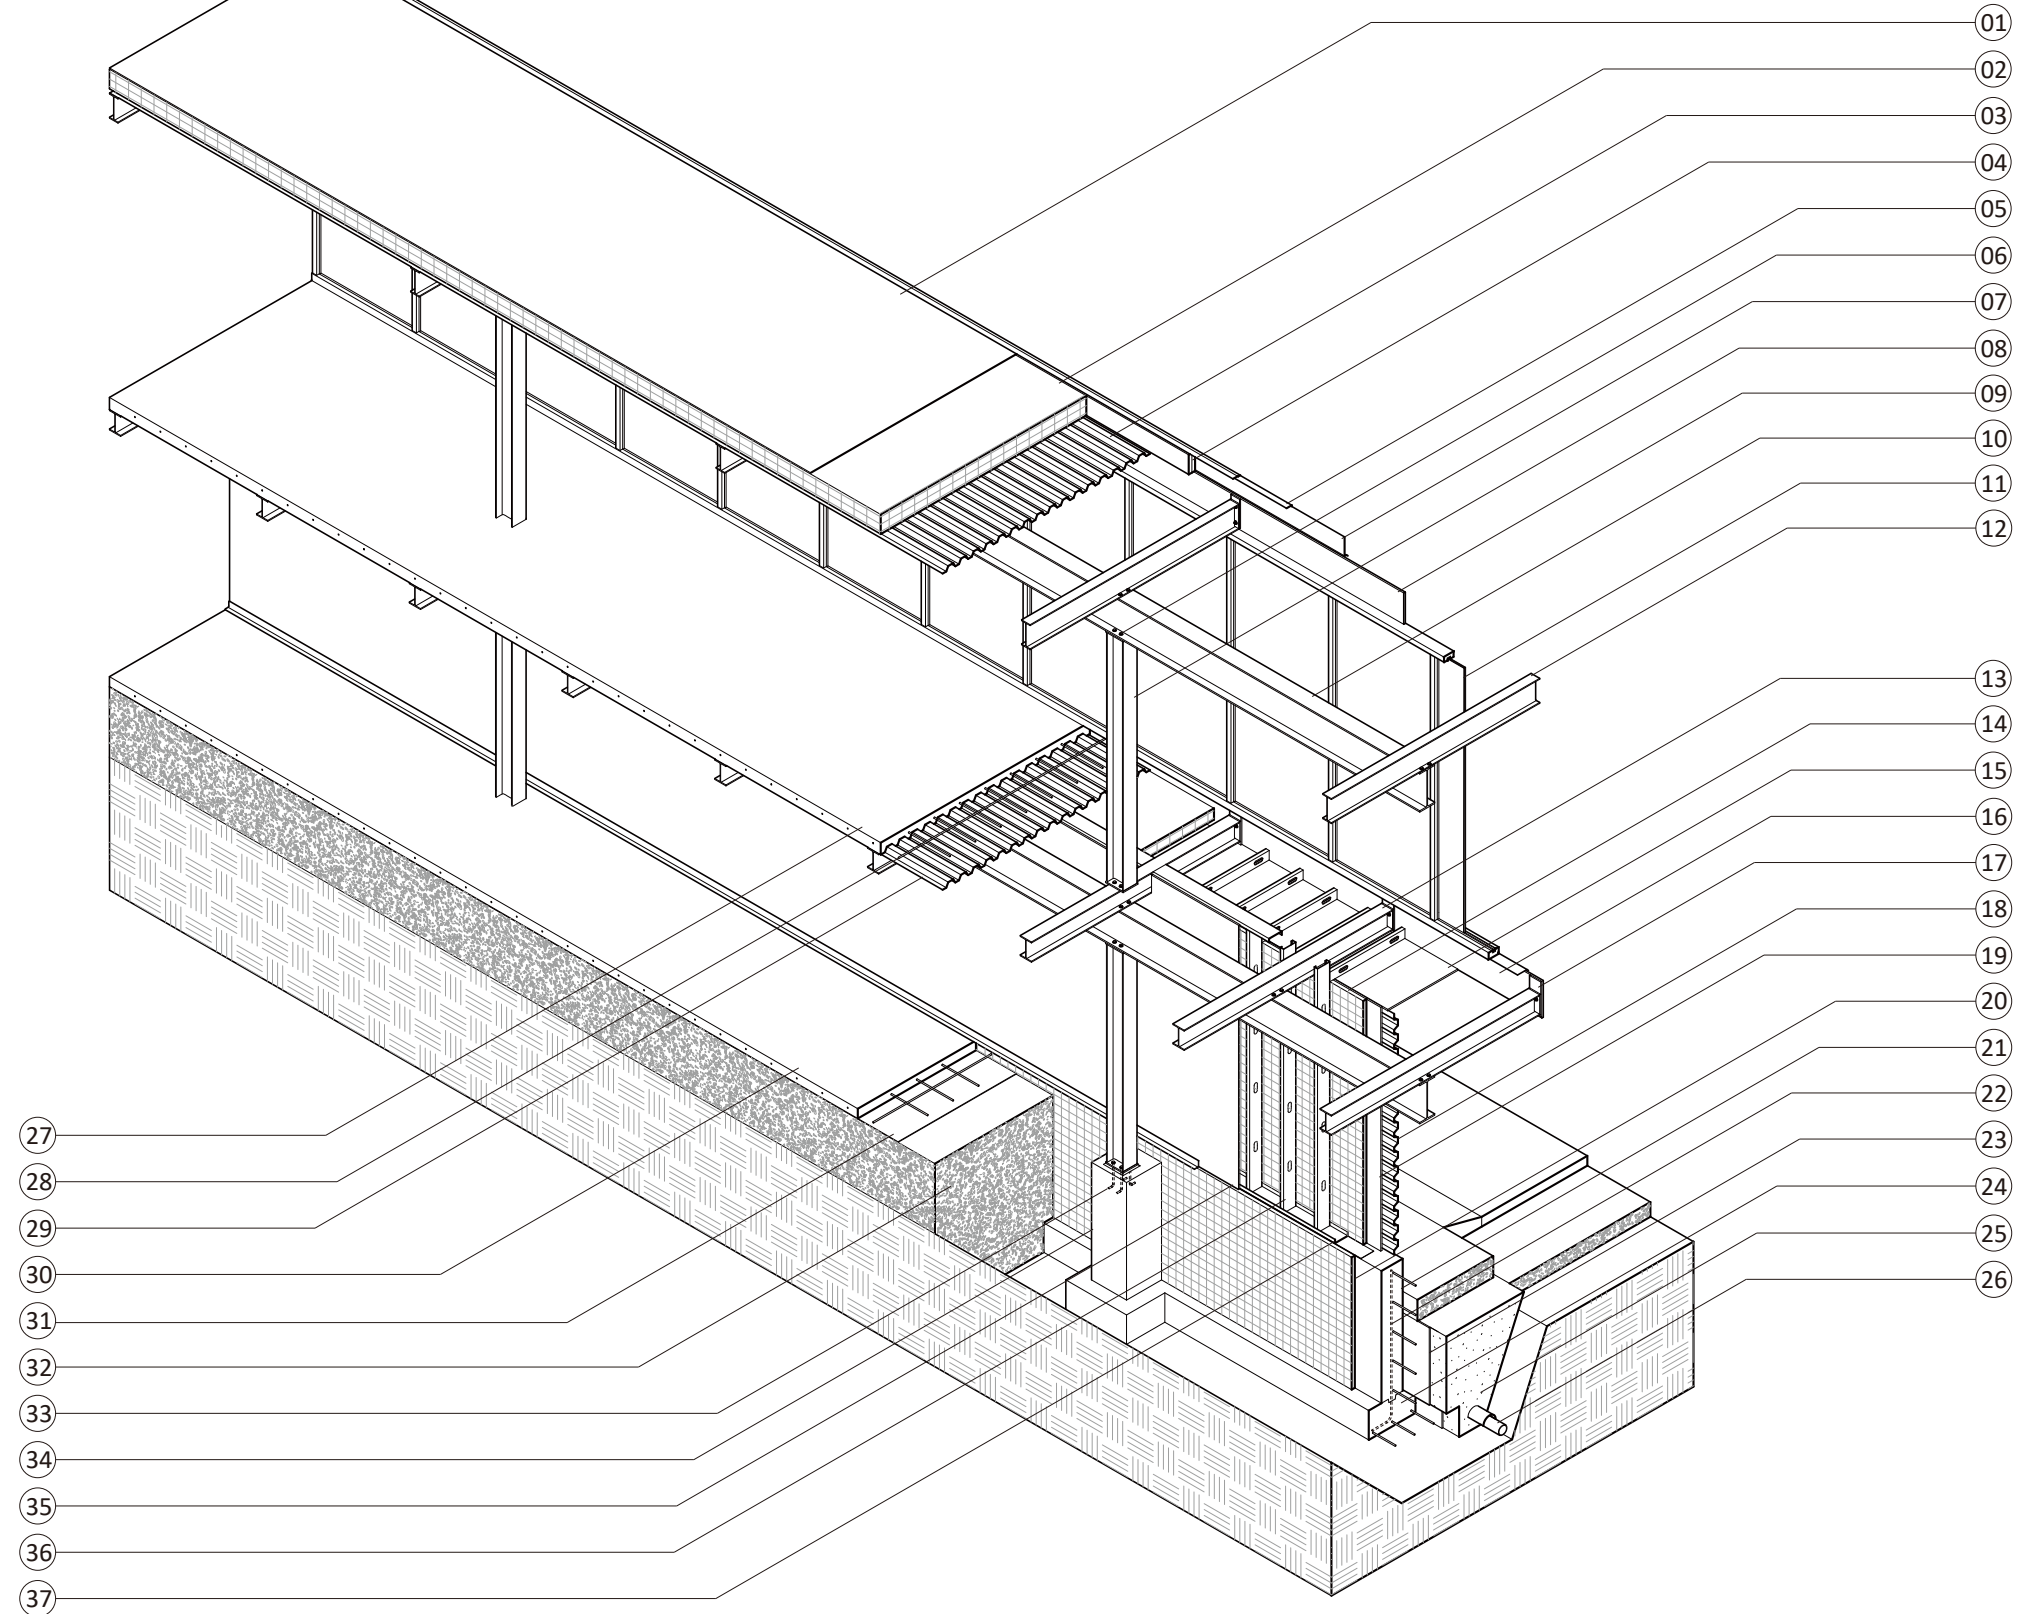

1

EXPLODED AXONOMETRIC

3/16" = 1' - 0"

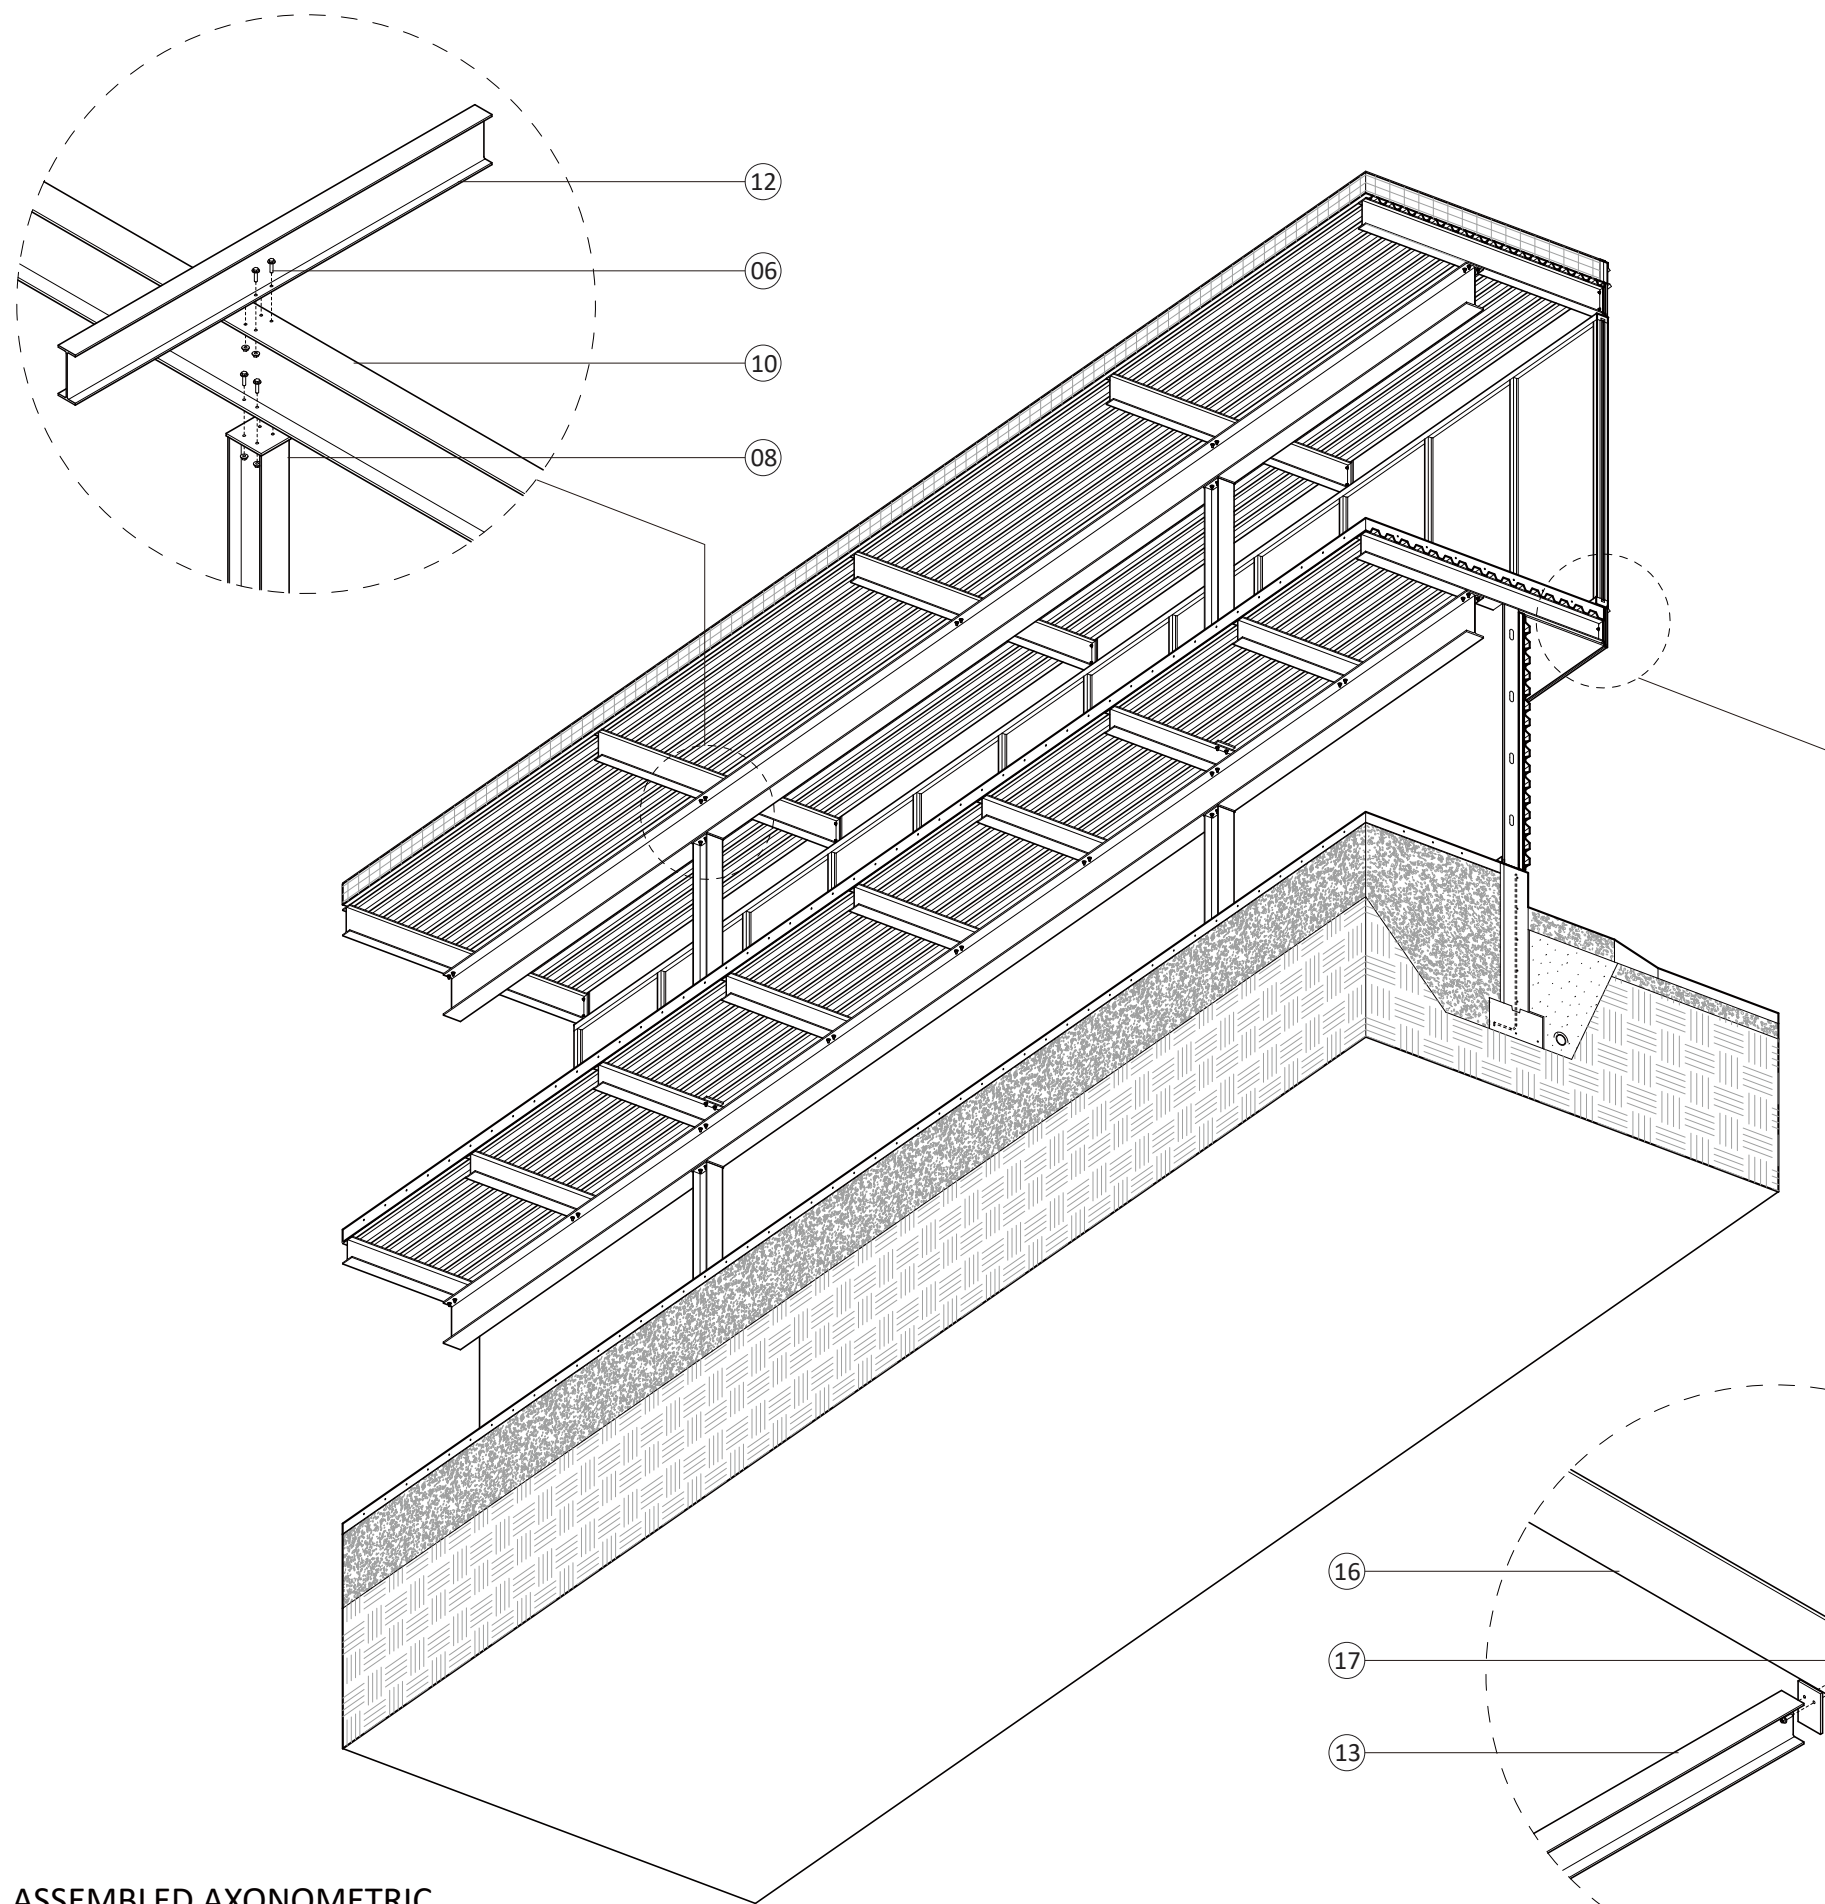

CONSTRUCTION MATERIAL KEY:

- 06 3/4" DIA. ASTM 325 BOLTS
- 08 STEEL COLUMN W8X24 @ 24'-0" O.C.
- 10 STEEL PRIMARY BEAM W16X45
- 12 STEEL SECONDARY BEAMS W10X19 @ 1
- 13 STEEL SECONDARY BEAMS W8X21 @ 6'-0" CENTERS
- 16 3/4" THICK ANODIZED ALUMIMUM FASCIA
- 17 THERMAL BREAK

2 ASSEMBLED AXONOMETRIC
3/16" = 1' - 0"